



GC1000XE

(GC1000PE for corded model)



Features

Assembly Required	No
Dishwasher Drain Connection	Yes
Grinder	Galvanized Steel
Hopper	PVC
Mounting System	Quick Mounting Sink Flange
Number of Pieces	1
Reset Overload Protector	Yes
Operation	Continuous Feed
Start Method	Wall Switch
Anti-Jam Automatic Reversing Action	No

Performance

Horsepower Motor	1/3 HP
Grinding Speed	1725 Revolutions per minute
Sound Insulation	No
Sound Package	No

Controls


Control Method	Centrifugal Switch
Power Connection	Line Cord

Capacity

Capacity	26 oz.
----------	--------



OVERALL DIMENSIONS

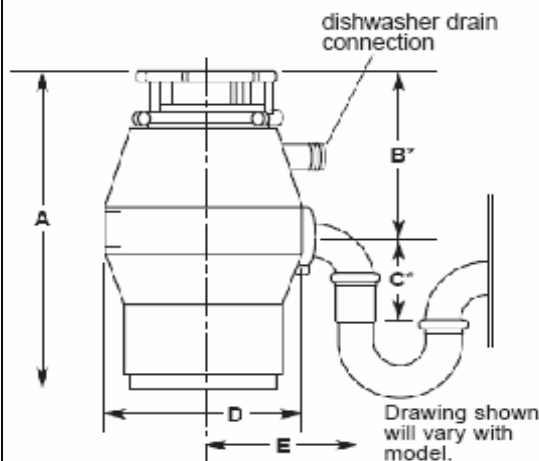

Model No.	A	B*	C*	D	E
GC1000XE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC1000PE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC2000XE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC2000PE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC5000XE	12-7/8"	6-11/16"	4"	7-3/4"	5-3/4"

B* – Distance from bottom of sink to center line of disposer outlet. Add 1/2 inch when stainless steel sink is used.

C* – Length of waste line pipe from center line of disposer outlet to end of waste line pipe.

IMPORTANT: Plumb waste line to prevent standing water in disposer motor housing.

KEY FEATURES:

- Continuous-Feed Operation
- 1/3 HP Motor
- 1,725 RPM
- ABS Grind Chamber
- Galvanized Steel Grinding Wheel & Shredder Ring
- Stainless Steel Swivel Impellers
- Stainless Steel Sink Flange with 1-Piece Plastic Stopper
- Overload Protector with Manual Reset
- 1-Year Limited Warranty

JOB SPECIFICATIONS



GC2000XE

(GC2000PE for corded model)



Features

Assembly Required	No
Dishwasher Drain Connection	Yes
Grinder	Galvanized Steel
Hopper	PVC
Mounting System	Quick Mounting Sink Flange
Number of Pieces	1
Reset Overload Protector	Yes
Operation	Continuous Feed
Start Method	Wall Switch
Anti-Jam Automatic Reversing Action	No

Performance

Horsepower Motor	1/2 HP
Grinding Speed	1725 Revolutions per minute
Sound Insulation	No
Sound Package	No

Controls


Control Method	Centrifugal Switch
Power Connection	Line Cord

Capacity

Capacity	26 oz.
----------	--------



OVERALL DIMENSIONS

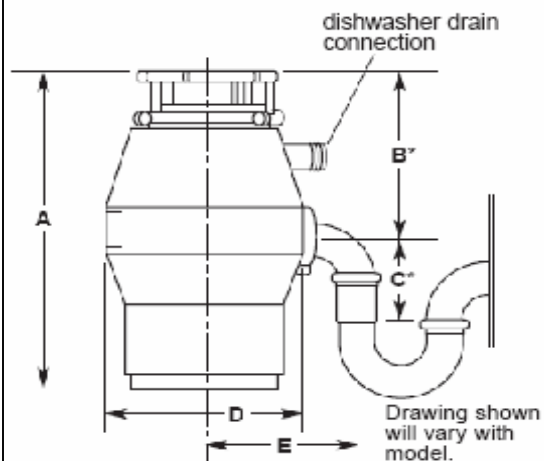

Model No.	A	B*	C*	D	E
GC1000XE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC1000PE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC2000XE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC2000PE	11-3/8"	5-15/16"	4"	6-5/16"	5"
GC5000XE	12-7/8"	6-11/16"	4"	7-3/4"	5-3/4"

B* – Distance from bottom of sink to center line of disposer outlet. Add 1/2 inch when stainless steel sink is used.

C* – Length of waste line pipe from center line of disposer outlet to end of waste line pipe.

IMPORTANT: Plumb waste line to prevent standing water in disposer motor housing.

KEY FEATURES:

- Continuous-Feed Operation
- 1/2 HP Motor
- 1,725 RPM
- ABS Grind Chamber
- Galvanized Steel Grinding Wheel & Shredder Ring
- Stainless Steel Swivel Impellers
- Stainless Steel Sink Flange with 1-Piece Plastic Stopper
- Overload Protector with Manual Reset
- 1-Year Limited Warranty

JOB SPECIFICATIONS



KBDS100T



Model Number	KBDS100T
Summary Product Code	933
Detail Product Code	274
Description	1 hp batch feed
FEATURES	
Feed Type	Batch Feed
Motor	
Type	Induction
Horsepower Rating	1 HP
RPM	1725
Starting Method	Electronic
Overload Protection	Manual Reset Overload
Automatic Reversing	Yes
Grinding System	
Grinding Chamber Capacity	40 oz
Grinding Chamber Material	Stainless Steel
Drain Chamber	D/C Al w/ detergent shield
Swivel Impellers	360 deg Stainless Steel
Fixed Impellers	Yes
Shredder Ring	Stainless Steel
Grinding Wheel	Stainless Steel
Mounting	
Quick Mounting System	Yes
Stainless Steel Sink Flange	Yes - High Polish
Trim / Sound Shell	3/4 Body
Stopper	Lock Cover Plastic
Jam Release	Yes - Anti Jam Circuit
OTHER SPECIFICATIONS	
Brand Name Location	On Label
Power Cord Length	None
Rated Voltage	120 Volts, 60 Hz
Rated Load	10.2
Electrical Circuit Requirements	15 or 20 Amp 3-wire - Grounded
Drain Connection	Clamp)
Dishwasher Connection	Yes
Average Water Usage	1 1/2 Gallons/Person/Day
Average Electrical Usage	1/2 KWH/Month
Agency Approvals	UL / CSA / ASSE
Net Weight	TBD
Shipping Weight	TBD
Manufacturer	In-Sink-Erator
DIMENSIONS	
Overall Height	12 3/4 inches
Overall Diameter	8 1/2 inches
Rough-in Plumbing Dimension	6 11/16"
Carton Size	TBD
COLORS	
Casing	Gray
Trim / Sound Shell	KitchenAid Red
LITERATURE	
Use & Care Guide	New
Installation Instructions	New
Product Warranty	7 Year Limited
ACCESSORIES	
Color Coordinated Sink Flange	
White	4211505
Biscuit	4211507
Brass	4211523



Feature Bullets:

- o MultiGrind Plus™ Technology features four grinding components that work together to handle anything from cornhusks to celery
- o The Jam-Sensor™ Circuit automatically senses then breaks through the toughest jams before you even notice a problem
- o SoundSeal Plus™ Technology combines four advanced sound-reducing components to make this disposer 60% quieter than a standard disposer
- o Batch feed system operates when the cover is inserted into the mouth of the disposer by turning the stopper to the left or right
- o Corrosion-resistant grind chamber and drain ensure lasting quality
- o Stainless steel shredder ring and grinding wheel add strength and provide longer disposer life

JOB SPECIFICATIONS

JOB SPECIFICATIONS	



KCDB250G



Model Number	KCDB250G
Summary Product Code	933
Detail Product Code	274
Description	1/2 hp
FEATURES	
Feed Type	Continuous
Motor	
Type	Induction
Horsepower Rating	1/2 HP
RPM	1725
Starting Method	Centrifugal Switch
Overload Protection	Manual Reset Overload
Automatic Reversing	No
Grinding System	
Grinding Chamber Capacity	26 oz.
Grinding Chamber Material	ABS
Drain Chamber	ABS
Swivel Impellers	360 deg Stainless Steel
Fixed Impellers	No
Shredder Ring	Galvanized Steel
Grinding Wheel	Galvanized Steel
Mounting	
Quick Mounting System	Yes
Stainless Steel Sink Flange	Yes
Trim / Sound Shell	1/3 Body
Stopper	Plastic w/ Seal
Jam Release	Yes - Wrench
OTHER SPECIFICATIONS	
Brand Name Location	On Label
Power Cord Length	None
Rated Voltage	120 Volts, 60 Hz
Rated Load	6.4 Amps
Electrical Circuit Requirement	Grounded
Drain Connection	1 1/2" Cushioned Slip Joint
Dishwasher Connection	Yes
Average Water Usage	1 1/2 Gallons/Person/Day
Average Electrical Usage	1/2 KWH/Month
Agency Approvals	UL
Net Weight	14 Lbs (6.4 Kg)
Shipping Weight	15 Lbs (6.8 Kg)
Manufacturer	In-Sink-Erator
DIMENSIONS	
Overall Height	11 3/8"
Overall Diameter	6.625"
Rough-in Plumbing Dimension	6" (Add 0.5" for SS Sink)
Carton Size	7.38"W x 13"H x 7.38"D
COLORS	
Casing	Gray
Trim / Sound Shell	KitchenAid Red
LITERATURE	
Use & Care Guide	New
Installation Instructions	New
Product Warranty	1 Year Limited
ACCESSORIES	
Color Coordinated Sink Flange	
White	4211505
Biscuit	4211507
Brass	4211523



Feature Bullets:

- o The grind wheel continuously drives food waste into the cutting teeth of the shredder ring for fast, efficient grinding
- o Corrosion-resistant grind and drain chambers ensure lasting quality
- o Galvanized steel grinding wheel and shredder ring ensure lasting quality
- o Whisper Quiet® Polystyrene Sound Barrier ensures quiet disposal
- o You can coordinate the sink flange and stopper to your sink with color options including white, almond, brass and stainless steel

JOB SPECIFICATIONS	



KCDS075T

Model Number	KCDS075T
Summary Product Code	933
Detail Product Code	274
Description	3/4 hp
FEATURES	
Feed Type	Continuous
Motor	
Type	Induction
Horsepower Rating	3/4 HP
RPM	1725
Starting Method	Centrifugal Switch
Overload Protection	Manual Reset Overload
Automatic Reversing	Yes
Grinding System	
Grinding Chamber Capacity	40 oz
Grinding Chamber Material	Stainless Steel
Drain Chamber	D/C Al w/ detergent shield
Swivel Impellers	360 deg Stainless Steel
Fixed Impellers	No
Shredder Ring	Stainless Steel
Grinding Wheel	Stainless Steel
Mounting	
Quick Mounting System	Yes
Stainless Steel Sink Flange	Yes - High Polish
Trim / Sound Shell	3/4 Body
Stopper	2-pc Stainless Steel
Jam Release	Yes - Wrench
OTHER SPECIFICATIONS	
Brand Name Location	On Label
Power Cord Length	None
Rated Voltage	120 Volts, 60 Hz
Rated Load	8.1
Electrical Circuit Requirements	15 or 20 Amp 3-wire - Grounded
Drain Connection	Clamp)
Dishwasher Connection	Yes
Average Water Usage	1 1/2 Gallons/Person/Day
Average Electrical Usage	1/2 KWH/Month
Agency Approvals	UL / ASSE
Net Weight	TBD
Shipping Weight	TBD
Manufacturer	In-Sink-Erator
DIMENSIONS	
Overall Height	12 3/4 inches
Overall Diameter	8 1/2 inches
Rough-in Plumbing Dimension	6 11/16"
Carton Size	TBD
COLORS	
Casing	Gray
Trim / Sound Shell	KitchenAid Red
LITERATURE	
Use & Care Guide	New
Installation Instructions	New
Product Warranty	5 Year Limited
ACCESSORIES	
Color Coordinated Sink Flange	
White	4211505
Biscuit	4211507
Brass	4211523



Feature Bullets:

o MultiGrind™ Technology grinds food in two stages, so you have the freedom to dispose of a wider variety of foods

o SoundSeal™ Technology combines four sound-reducing components to make this disposer 40% quieter than a standard disposer

o Continuous feed system operates by an electrical switch for fast, efficient grinding

o Corrosion-resistant grind chamber and drain ensure lasting quality

o Stainless steel shredder ring and grinding wheel add strength and provide longer disposer life

JOB SPECIFICATIONS



KCDS100T



Model Number	KCDS100T
Summary Product Code	933
Detail Product Code	274
Description	1 hp continuous
FEATURES	
Feed Type	Continuous
Motor	
Type	Induction
Horsepower Rating	1 HP
RPM	1725
Starting Method	Electronic
Overload Protection	Manual Reset Overload
Automatic Reversing	Yes
Grinding System	
Grinding Chamber Capacity	40 oz
Grinding Chamber Material	Stainless Steel
Drain Chamber	D/C Al w/ detergent shield
Swivel Impellers	360 deg Stainless Steel
Fixed Impellers	Yes
Shredder Ring	Stainless Steel
Grinding Wheel	Stainless Steel
Mounting	
Quick Mounting System	Yes
Stainless Steel Sink Flange	Yes - High Polish
Trim / Sound Shell	3/4 Body
Stopper	2-pc Stainless Steel
Jam Release	Yes - Anti Jam Circuit
OTHER SPECIFICATIONS	
Brand Name Location	On Label
Power Cord Length	None
Rated Voltage	120 Volts, 60 Hz
Rated Load	10.2
Electrical Circuit Requirement	15 or 20 Amp 3-wire - Grounded
Drain Connection	Clamp)
Dishwasher Connection	Yes
Average Water Usage	1 1/2 Gallons/Person/Day
Average Electrical Usage	1/2 KWH/Month
Agency Approvals	UL / ASSE
Net Weight	TBD
Shipping Weight	TBD
Manufacturer	In-Sink-Erator
DIMENSIONS	
Overall Height	12 3/4 inches
Overall Diameter	8 1/2 inches
Rough-in Plumbing Dimension	6 11/16"
Carton Size	TBD
COLORS	
Casing	Gray
Trim / Sound Shell	KitchenAid Red
LITERATURE	
Use & Care Guide	New
Installation Instructions	New
Product Warranty	7 Year Limited
ACCESSORIES	
Color Coordinated Sink Flange	
White	4211505
Biscuit	4211507
Brass	4211523



Feature Bullets:

- o MultiGrind Plus™ Technology features four grinding components that work together to handle anything from cornhusks to celery
- o The Jam-Sensor™ Circuit automatically senses then breaks through the toughest jams before you even notice a problem
- o SoundSeal Plus™ Technology combines four advanced sound-reducing components to make this disposer 60% quieter than a standard disposer
- o Continuous feed system operates by an electrical switch for fast, efficient grinding
- o Corrosion-resistant grind chamber and drain ensure lasting quality
- o Stainless steel shredder ring and grinding wheel add strength and provide longer disposer life

JOB SPECIFICATIONS
